

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C08L 23/06, 23/04	A1	(11) International Publication Number: WO 96/35750 (43) International Publication Date: 14 November 1996 (14.11.96)
(21) International Application Number: PCT/US95/07643 (22) International Filing Date: 16 June 1995 (16.06.95) (30) Priority Data: 08/437,655 9 May 1995 (09.05.95) US (71) Applicant: THE DOW CHEMICAL COMPANY [US/US]; 2030 Dow Center, Abbott Road, Midland, MI 48640 (US). (72) Inventors: WOOSTER, Jeffrey, J.; 201 Almond Drive, Lake Jackson, TX 77566 (US). GEUSSENS, Theo, L., V.; Ophovenstraat 44, B-3670 Meeuwen-Gruitrode (BE). VAN DUN, Jozef, J., I.; Amelbergstraat 80, B-2240 Zandhoven (BE). (74) Agent: KANUCH, Bruce, M.; The Dow Chemical Company, Patent Dept., P.O. Box 1967, Midland, MI 48641-1967 (US).		(81) Designated States: AU, CA, JP, KR, MX, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>
(54) Title: MEDIUM MODULUS MOLDED MATERIAL COMPRISING SUBSTANTIALLY LINEAR POLYETHYLENE AND FABRICATION METHOD (57) Abstract Medium modulus molded polyethylene materials with improved impact strength are made. The polyethylene material is molded to pipes, bars and sheets. The molded material comprises high molecular weight linear polyethylene and a substantially linear ethylene/ α -olefin interpolymer. The material is more than about 0.23 mm thick, has a density in the range of 0.923 to 0.95 grams/cubic centimeter (g/cc) and has an excellent impact resistance.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

MEDIUM MODULUS MOLDED MATERIAL COMPRISING SUBSTANTIALLY LINEAR
POLYETHYLENE AND FABRICATION METHOD

This application is related to the pending application entitled "Medium Modulus
5 Film and Fabrication Method" filed herewith on May 9, 1994, in the names of Brad A. Cobler,
Larry D. Cady, Lisa E. Dodson and Osborne K. McKinney, to pending application serial number
08/054,379 filed 4/28/93 in the names of Pak-Wing S. Chum, Ronald P. Markovich, George W.
Knight and Shih-Yaw Lai, and a continuation-in-part of co-pending application, serial number
08/239,496 filed on May 9, 1994, in the names of Jeffrey J. Wooster, Bard A. Cobler, Larry D.
10 Cady, David G. Bertelsman, Lisa E. Dodson and Osborne K. McKinney.

This invention pertains to a medium modulus molded polyethylene material and
a method for preparing such material. The novel molded material can be prepared by
extrusion, compression molding or casting processes. The polyethylene material can be molded
to articles, such as pipes, tubes, bars, wire coatings, sheets or molded parts, such as automotive
15 parts and hollow articles, such as containers. The molded material has surprisingly high impact
properties.

Molded polyethylene materials find wide usage, for example in gas pipe or water
pipe applications. Such materials must have a sufficient stiffness to provide long-term
dimensional stability. Furthermore, they must have a high impact strength to minimize failures
20 during usage. Advantageously, the materials should also be resistant to crack propagation,
that means that an accidental crack or failure should stop and not run over extended length of
the material.

It is known to blend polyethylene with various polymers to improve its impact
properties. E. Ceaucescu et al. (*Revue Roumaine de Chimie*, 34, 3, 711-724 (1989)) disclose that
25 the shock resistance of a high density polyethylene (HDPE) can be improved by incorporating a
butadiene-styrene block copolymer therein. J. Rhee and B. Crist (*Journal of Polymer Science:
Part B: Polymer Physics*, Vol 32, 159-169 (1994)) discuss the plain strain fracture toughness of
blends of HDPE and hydrogenated polybutadiene. W.S. Smith (*Soc. Plast. Eng., Tech. Pap.*
(1975), 21, pages 394-396 describe the use of ethylene-propylene rubber for improving the
30 impact strength and/or environmental stress crack resistance of polypropylene. Alternatively,
the ethylene-propylene rubber may be blended with low density polyethylene or high density
polyethylene.

Matsuura et al., U.S. Patent 4,330,639 disclose a polymer composition to form
polyethylene films which are said to have a high impact strength and a high tear strength. The
35 polymer composition comprises an ethylene/C₃-C₈ α -olefin copolymer having an intrinsic
viscosity of 1.3 to 8.3 dl/g and a density of 0.850 to 0.930 and an ethylene polymer having a
melt index of 0.01 to 0.2, a flow parameter of 1.9 to 2.8 and a density not lower than 0.940.

Bailey et al. (U.S. Patent 4,461,873) disclose ethylene polymer mixtures having a density in the range of 0.940 to 0.965 g/cc and comprising (a) 40 to 70 weight parts of a high molecular weight, low density ethylene polymer having a high load melt index in the range of 0.1 to 1.5 g/10 min., a density of 0.930 to 0.945 g/cc, a heterogeneity index of less than 10 and
5 having essentially no other branching than short chain branching, and (b) 60 to 30 weight parts of a low molecular weight, high density ethylene polymer having a melt index in the range of 45 to 300 g/10 min., a density above 0.950, a heterogeneity index of less than 6 and being essentially linear. The polymer composition is said to be useful for the production of polyolefin films, pipe production and wire coating. The films are said to have good environmental stress
10 crack behavior.

Shirodkar (U.S. Patent 5,041,501) discloses polymer blends of linear low density polyethylene (LLDPE) with a minor amount of an isotactic, partially crystalline butene-1 polymer for producing blown films having improved impact properties. Shirodkar (U.S. Patent 5,242,922) discloses polymer blends of HDPE with a minor amount of an isotactic,
15 partially crystalline butene-1 polymer for producing containers with lower swell compared to those of the unblended HDPE.

Thiersault et al. (U.S. Patent 4,786,688) discloses polyethylene compositions containing from 50 to 98 weight percent of HDPE and from 2 to 50 weight percent of LLDPE with a density below 0.930. The composition is said to be particularly adapted for the
20 manufacture of films and hollow bodies by blow-molding.

Calabro et al. (U.S. Patent 5,102,955) disclose a low density polymer having a broad molecular weight distribution, such that its melt flow ratio is 50 to 250, and a substantially constant melt index-corrected density. The polymer is produced by blending a first polymer component of high molecular weight with a second polymer component of low
25 molecular weight, with both polymer components having substantially the same melt index-corrected density. The polymer is said to produce films having improved strength properties, as compared to films made from individual polymer components.

European patent application EP-A-0,517,222 discloses a polyethylene moulding material which consists of from 50 to 80 weight percent of a HDPE, having a density of from
30 0.940 to 0.960 g/cm³ and a MFI 190/2.16 of from 0.01 to 0.5 g/10 min. and a broad bimodal molar mass distribution, and of from 20 to 50 weight percent of a polyethylene of a density of from 0.910 to 0.925 g/cm³ and a MFI 190/2.16 of from 0.5 to 2.0 g/10 min. The polyethylene moulding material has a density of from 0.930 to 0.940 g/cm³ and a MFI 190/2.16 of from 0.05 to 1.0 g/10 min. The polyethylene of low density may be a linear polyethylene (LLDPE) with a
35 narrow unimodal molar mass distribution. The European patent application discloses that pipes, sheets and films of good long term and low temperature properties can be produced. Particularly, the material is said to have extraordinary resistance to slow crack propagation (ESCR).

Additionally, ternary polymer blends are known. For example, in U.S. Patent 4,824,912, Su et al. disclose LLDPE blended with minor amounts of a low molecular weight HDPE (LMW-HDPE) and a high molecular weight HDPE (HMW-HDPE) for processability and film property improvements over LLDPE used alone.

- 5 Applicants have found a novel medium modulus, molded polyethylene material having excellent impact strength and good dimensional stability, and a method to prepare such molded material.

The novel molded material has a thickness of greater than about 0.23 mm and comprises:

- 10 (A) from 60 to 99 weight percent, based on the combined weights of components (A) and (B), of at least one high molecular weight linear ethylene polymer having a density in the range of 0.92 to 0.96 g/cc and an I_5 melt index in the range of 0.1 to 3 g/10 minutes, and
(B) from 1 to 40 weight percent, based on the combined weights of components (A) and (B), of at least one substantially linear ethylene/ α -olefin interpolymer characterized as having:
- 15 i. a melt flow ratio, I_{10}/I_2 , ≥ 5.63 ,
ii. a molecular weight distribution, M_w/M_n , defined by the equation:
$$M_w/M_n \leq (I_{10}/I_2) - 4.63, \text{ and}$$

iii. a critical shear rate at onset of surface melt fracture at least 50 percent greater than the critical shear rate at the onset of surface melt fracture of a linear olefin polymer
20 having essentially the same I_2 and M_w/M_n
wherein the substantially linear ethylene/ α -olefin interpolymer is further characterized as containing at least one α -olefin monomer and having a density in the range of 0.85 to 0.92 g/cc and an I_2 melt index in the range of 0.3 to 3 g/10 minutes.

- One method for producing such medium modulus molded polyethylene material
25 is an extrusion process which comprises the steps of:

- (1) providing an extrudable thermoplastic composition containing (A) from 60 to 99 weight percent, based on the combined weights of components (A) and (B), of at least one high weight molecular linear ethylene polymer having a density in the range of 0.92 to 0.96 g/cc and an I_5 melt index in the range of 0.1 to 3 g/10 minutes, and (B) from 1 to 40 weight percent,
30 based on the combined weights of components (A) and (B), of at least one substantially linear ethylene/ α -olefin interpolymer characterized as having:
- i. a melt flow ratio, I_{10}/I_2 , ≥ 5.63 ,
ii. a molecular weight distribution, M_w/M_n , defined by the equation:
$$M_w/M_n \leq (I_{10}/I_2) - 4.63, \text{ and}$$

35 iii. a critical shear rate at onset of surface melt fracture at least 50 percent greater than the critical shear rate at the onset of surface melt fracture of a linear olefin polymer having essentially the same I_2 and M_w/M_n

wherein the substantially linear ethylene/ α -olefin interpolymer is further characterized as containing at least one α -olefin monomer and having a density in the range of 0.85 to 0.92 g/cc and an I_2 melt index in the range of 0.3 to 3 g/10 minutes, optionally pelletizing the composition,

- 5 (2) introducing said optionally pelletized composition of step (1) into an extrusion apparatus, and
(3) extruding said composition of step (1) to form a material with a thickness greater than about 0.23 mm, and
(4) conveying said material formed in step (3) for subsequent use down-line of the extrusion
10 apparatus of step (2) or collecting said material formed in step (3) for subsequent use off-line.

The molded material of the present invention has improved impact performance that is not ordinarily expected for medium modulus polyethylene. The novel molded material has an improved impact strength relative to prior art molded materials having about the same density, stiffness (measured as yield strength), melt index and thickness which are produced
15 from blends of a) high molecular weight high density polyethylene (HDPE) and b) linear low density polyethylene (LLDPE), very low density polyethylene (VLDPE), butyl rubber, ethylene-propylene copolymer (EPM) or ethylene-propylene-diene terpolymer (EPDM). At ambient temperature, the novel molded materials often have at least 30 percent, and preferably at least 50 percent, improvement in impact properties relative to the mentioned polyethylene material.
20 The improved impact resistance reduces failures of the molded materials due to crack propagation.

Figure 1 plots data describing the relationship between M_w/M_n and I_{10}/I_2 for three distinct polymer types: substantially linear polyethylene, heterogeneous linear polyethylene and homogeneous linear polyethylene.

25 Glossary and Test Methods

The term "interpolymer" as used herein refers to polymers prepared by the polymerization of at least two different monomers. The generic term interpolymer thus embraces copolymers, usually employed to refer to polymers prepared from two different monomers, and polymers prepared from more than two different monomers.

30 Low density polyethylene ("LDPE") herein designates an ethylene polymer which is generally prepared at high pressure using free radical initiators and typically has a density in the range of 0.915 to 0.940 g/cm³. LDPE is also known as "branched" polyethylene because of the relatively large number of long chain branches extending from the main polymer backbone.

35 High density polyethylene ("HDPE") herein designates an ethylene polymer which has a density in the range of greater than 0.940 to 0.960 g/cm³. HDPE is prepared using a coordination catalyst, for example, Ziegler-Natta type catalysts, at low or moderate pressures,

but sometimes at high pressure. HDPE is linear without any substantial side chain branching. HDPE is a substantially crystalline polymer.

Linear, low density polyethylene ("LLDPE") is generally prepared in the same manner as HDPE, but incorporates a relatively minor amount of an α -olefin comonomer such as butene, hexene or octene to introduce enough short chain branches into the otherwise linear polymer to reduce the density of the resultant polymer into the range of that of LDPE. The coordination catalysts used to interpolymerize ethylene and the α -olefin generally produce an LLDPE with a relatively broad weight molecular weight distribution, that is, M_w/M_n greater than 3. Such LLDPE's also have relatively broad composition distribution in that the proportion of α -olefin comonomer molecules incorporated into the polymer molecules varies. Generally, the lower molecular weight polymer molecules contain a relatively higher proportion of the α -olefin comonomer than the higher molecular weight polymer molecules.

The terms "ultra low density polyethylene" (ULDPE), "very low density polyethylene" (VLDPE) and "linear very low density polyethylene" (LVLDPE) have been used interchangeably in the polyethylene art to designate the polymer subset of linear low density polyethylenes having a density less than or equal to about 0.915 g/cc. The term "linear low density polyethylene" (LLDPE) is then applied to those linear polyethylenes having a density above about 0.915 g/cc.

The terms "heterogeneous" and "heterogeneously branched" are used herein in the conventional sense in reference to a linear ethylene/ α -olefin polymer having a comparatively low short chain branching distribution index. The short chain branching distribution index (SCBDI) is defined as the weight percent of the polymer molecules having a comonomer content within 50 percent of the median total molar comonomer content. The short chain branching distribution index of polyolefins can be determined by well-known temperature rising elution fractionation techniques, such as those described by Wild et al., Journal of Polymer Science, Poly. Phys. Ed., Vol. 20, p. 441 (1982), L. D. Cady, "The Role of Comonomer Type and Distribution in LLDPE Product Performance," SPE Regional Technical Conference, Quaker Square Hilton, Akron, Ohio, October 1-2, pp. 107 to 119 (1985), or U.S. Patent 4,798,081. Heterogeneous linear ethylene/ α -olefin polymers typically have a SCBDI less than about 30 percent.

The terms "homogeneous" and "homogeneously branched" are used in the conventional sense in reference to an ethylene/ α -olefin polymer in which the comonomer is randomly distributed within a given polymer molecule and wherein substantially all of the polymer molecules have the same ethylene to comonomer molar ratio. Homogeneously branched polymers are characterized by a short chain branching distribution index (SCBDI) greater than or equal to 30 percent, preferably greater than or equal to 50 percent, more preferably greater than or equal to 90 percent.

The term "homogeneous linear ethylene/ α -olefin polymers" means that the olefin polymer has a homogeneous short branching distribution but does not have long chain branching. That is, the linear ethylene/ α -olefin polymer has an absence of long chain branching. Such polymers include linear low density polyethylene polymers and linear high density polyethylene polymers and can be made using polymerization processes (for example, as described by Elston in U.S. Patent 3,645,992) which provide uniform branching (that is, homogeneously branched) distribution. Uniform branching distributions are those in which the comonomer is randomly distributed within a given interpolymer molecule and wherein substantially all of the interpolymer molecules have the same ethylene/comonomer ratio within that interpolymer. In his polymerization process, Elston uses soluble vanadium catalyst systems to make such polymers, however, others such as Mitsui Chemical Corporation and Exxon Chemical Company have used so-called single site catalyst systems to make polymers having a similar homogeneous structure.

The term "homogeneous linear ethylene/ α -olefin polymers" does not refer to high pressure branched polyethylene which is known to those skilled in the art to have numerous long chain branches. Typically, the homogeneous linear ethylene/ α -olefin polymer is an ethylene/ α -olefin interpolymer, wherein the α -olefin is at least one C₅-C₂₀ α -olefin (for example, 1-pentene, 4-methyl-1-pentene, 1-hexene or 1-octene), preferably wherein at least one of the α -olefins is 1-octene. Most preferably, the ethylene/ α -olefin interpolymer is a copolymer of ethylene and a C₅-C₂₀ α -olefin, especially an ethylene/C₁-C₆ α -olefin copolymer.

The term "medium modulus" is used herein in reference to the novel molded material to mean the calculated material density is in the range of 0.923 to 0.95 g/cc. The term "calculated material density" is used herein to mean the density of the material when calculated from the known weight fractions and the measured annealed densities of the component polymers or layers.

The density of the polymers used to make the medium modulus molded material of the present invention is measured in accordance with ASTM D-792 and is reported as grams/cubic centimeter (g/cc). The measurements reported in the Examples below are determined after the polymer samples have been annealed for 1 hour at 100°C and 4 hours at 23°C and 50 percent relative humidity.

Melt index measurements are performed according to ASTM D-1238, Condition 190°C/2.16 kilogram (kg) and Condition 190°C/5 kg, and are known as I₂ and I₅, respectively. Melt index is inversely proportional to the molecular weight of the polymer. Thus, the higher the molecular weight, the lower the melt index, although the relationship is not linear. Melt index is reported as g/10 minutes. Melt index determinations can also be performed with even higher weights, such as in accordance with ASTM D-1238, Condition 190°C/10 kg and Condition 190°C/21.6 kg, and are known as I₁₀ and I_{21.6}, respectively.

The term "melt flow ratio" as defined herein in the conventional sense as the ratio of a higher weight melt index determination to a lower weight determination. For measured I_{10} and I_2 melt index values, the melt flow ratio is conveniently designated as I_{10}/I_2 . For $I_{21.6}$ and I_{10} values, the ratio is designated $I_{21.6}/I_{10}$. Other melt flow ratios are occasionally
5 used respecting polyethylene compositions, such as, for example, I_5/I_2 based on I_5 and I_2 melt index measurements. In general, $I_{21.6}/I_{10}$ and I_5/I_2 determinations provide similar melt flow values and I_{10}/I_2 values are usually greater than $I_{21.6}/I_{10}$ values by a factor of about 4.4 and this factor is used for purposes of this invention in calculating certain values in the Examples.

The crystallinity, as mentioned in Table 1 below is measured according to ASTM
10 D3417-75, the heat of fusion is determined from the second heating cycle by measuring the area under the fusion endotherm by drawing a baseline from the point at -20°C to the point at Peak temperature $+20^{\circ}\text{C}$. The heat of fusion is divided by 292 J/g and multiplied by 100 to obtain the percent crystallinity. The tensile properties of the molded materials are measured in accordance with ASTM D 638-76 and are reported in MPa for the Yield and Ultimate tensile
15 strengths and in percent for the Elongation. The impact properties, specifically the impact strength, of the molded material is evaluated by means of Izod Impact values and the critical strain energy release rate G_c . The Izod impact values are measured in accordance with ASTM D-256. The critical strain energy release rate G_c is measured using the Charpy Test, in accordance with the procedure described by E. Plati and J.G. Williams in Polymer Engineering and Science,
20 June, 1975, Vol 15, No. 6, pp. 470 to 477. The Pennsylvania Notch Test (PENT) is a Slow Crack Growth test, performed following the procedure described by X. Lu and N. Brown, Polymer Testing 11 (1992), pages 309 to 319; the test was conducted under a 2.4 MPa stress at 80°C . The Small Scale Steady State (S4) test is an impact test for pipes described by P. Vanspeybroek in : Proceedings Plastic Pipes VIII, Eindhoven (The Netherlands), Sept. 1992, The Plastics and Rubber
25 Institute, p. D1/6 1-14. In this test the crack is initiated by the impact of a gas-gun fired chisel on a well supported and not pressurized initiation zone. This crack is injected in the pressurized propagation zone in an external containment against flaring and decompression and providing controlled local environment. The reported Critical Pressures $p_{c,S4}$ are the operating pressures at which a crack propagates instead of arrests and is given at different temperatures.

30 The medium modulus, molded polyethylene material of the present invention has a calculated material density in the range of 0.923 g/cc to 0.95 g/cc , especially, 0.926 g/cc to 0.948 g/cc , and more especially, 0.93 g/cc to 0.946 .

The thickness of the material is greater than about 0.23 mm , preferably in the range of 0.5 mm to 50 mm , and more preferably, in the range of 3 mm to 30 mm .

35 At ambient temperatures, these novel materials preferably have Izod Impact values and a critical strain energy release rate G_c at least 30 percent greater, more preferably at least 50 percent greater, than the Izod Impact values and G_c of a comparative prior art

polyethylene material having about the same material density, melt index, yield strength and material thickness.

The composition comprising the components (A) and (B) described in more detail below can be molded to pipes, tubes, bars, sheets or materials of other shapes, such as automotive parts, having a material thickness of greater than about 0.23 mm. The molded material is particularly useful in applications where molded materials with a good property balance, that means with good dimensional stability, that is stiffness, and with good impact strength, that is toughness, are needed.

The high molecular weight linear ethylene polymers, Component (A), for use in preparing the medium modulus, molded polyethylene material of the instant invention are a known class of compounds which can be produced by any well-known particle-form polymerization process, such as slurry polymerization and gas phase polymerization. Preferably, the high molecular weight linear ethylene polymers are produced using well-known Phillips or Ziegler type coordination catalysts, although metallocene catalyst systems can also be used. Although preferred, with conventional Ziegler type catalysts, slurry polymerization processes are generally limited to polymer densities greater than about 0.940 g/cc and especially limited to polymer densities greater than about 0.935 g/cc, that is, about 0.935 g/cc is the practical lower commercial limit for slurry polymerization.

The high molecular weight linear ethylene polymer can be an ethylene homopolymer or a copolymer of ethylene with at least one α -olefin of from 3 to 20 carbon atoms. However, preferably, the high molecular weight linear polymer is a copolymer with at least one C_3 - C_{20} α -olefin, such as 1-propylene, 1-butene, 1-isobutylene, 4-methyl-1-pentene, 1-hexene, 1-heptene and 1-octene. Most preferably, the high molecular weight linear ethylene polymer is an ethylene/1-butene copolymer prepared by a low pressure slurry polymerization process. The novel molded material comprises from 60 to 99 weight percent high molecular weight linear ethylene polymer, generally 60 to 95 weight percent, preferably 60 to 92.5 weight percent, more preferably 65 to 90 weight percent, and most preferably 70 to 85 weight percent.

Component (A) can also be a blend of linear ethylene polymers. Such blends can be prepared in-situ (for example, by having a mixture of catalysts in a single polymerization reactor or by using different catalysts in separate reactors connected in parallel or in series) or by physical blending of polymers.

The high molecular weight linear ethylene polymer has an I_5 melt index in the range of 0.1 g/10 minutes to 3 g/10, preferably, 0.1 g/10 minutes to 2 g/10 minutes, more preferably, 0.15 g/10 minutes to 1 g/10 minutes and more preferably, 0.15 g/10 minutes to 0.5 g/10 minutes. Additionally, the linear polymer preferably has a bimodal molecular weight distribution (MWD) and an $I_{21.6}/I_{10}$ ratio in the range of from 1 to 12, preferably in the range of

from 3.5 to 10, more preferably in the range of from 4 to 8, and most preferably in the range of from 4.5 to 6.

The high molecular weight linear ethylene polymer, which includes, but is not limited to, LLDPE, LMDPE (linear medium density polyethylene) and HDPE, and mixtures thereof, preferably has a density in the range of from 0.92 g/cc to 0.96 g/cc, more preferably, in the range of from 0.93 g/cc to 0.96 g/cc, and most preferably, in the range of from 0.935 g/cc to 0.958 g/cc.

The substantially linear ethylene/ α -olefin polymers used in the present invention Component (B), are a unique class of compounds that are defined in US 5,272,236 and U.S. Patent 5,278,272 by Lai et al. Lai et al. teach that such polymers are preferably prepared by a continuous, solution phase polymerization process using the constrained geometry catalyst discovered by Stevens et al. U.S. Patent 5,055,438. The substantially linear ethylene/ α -olefin interpolymers contain ethylene interpolymerized with at least one C_3 - C_{20} α -olefin, such as 1-propylene, 1-butene, 1-isobutylene, 1-hexene, 4-methyl-1-pentene, 1-heptene and 1-octene, as well as other monomer types such as styrene, halo- or alkyl-substituted styrenes, tetrafluoroethylene, vinyl benzocyclobutane, 1,4-hexadiene, 1,7-octadiene, and cycloalkenes, for example, cyclopentene, cyclohexene and cyclooctene. Although the substantially linear ethylene/ α -olefin interpolymer can be a terpolymer where at least two α -olefin monomers are polymerized with ethylene, preferably the interpolymer is a copolymer with one α -olefin monomer copolymerized with ethylene and most preferably the substantially linear ethylene/ α -olefin interpolymer is a copolymer of ethylene and 1-octene.

The substantially linear ethylene/ α -olefin interpolymers used in the present invention are not in the same class as homogeneous linear ethylene/ α -olefin copolymers, nor heterogeneous linear ethylene/ α -olefin polymers, nor are they in the same class as traditional highly branched low density polyethylene. The substantially linear ethylene/ α -olefin polymers useful in this invention are indeed a unique class of polymers which have excellent processability, even though they have relatively narrow molecular weight distributions (typically, about 2). Even more surprisingly, as described in US Patent 5,278,272 by Lai et al., the melt flow ratio (I_{10}/I_2) of the substantially linear ethylene/ α -olefin interpolymers can be varied essentially independently of the polydispersity index (that is, the molecular weight distribution, M_w/M_n). As figure 1 illustrates, the rheological behavior of substantially linear ethylene polymers constitutes a dramatic contradistinction over to a homogeneous linear ethylene/ α -olefin polymer and to conventional heterogeneous linear polyethylene in that both heterogeneous linear and homogeneous linear ethylene polymers have rheological properties such that the I_{10}/I_2 value only increases as the polydispersity index increases.

Substantially linear ethylene/ α -olefin polymers (SLEP) are homogeneous polymers having long chain branching. The long chain branches have the same comonomer distribution as the polymer backbone and can be as long as about the same length as the length of the

polymer backbone. The polymer backbone is substituted with 0.01 long chain branches/1000 carbons to 3 long chain branches/1000 carbons, more preferably from 0.01 long chain branches/1000 carbons to 1 long chain branches/1000 carbons, and especially from 0.05 long chain branches/1000 carbons to 1 long chain branches/1000 carbons.

5 Long chain branching is defined herein as a chain length of at least 6 carbons, above which the length cannot be distinguished using ^{13}C nuclear magnetic resonance spectroscopy. The long chain branch can be as long as about the same length as the length of the polymer backbone to which it is attached.

The presence of long chain branching can be determined in ethylene
10 homopolymers by using ^{13}C nuclear magnetic resonance (NMR) spectroscopy and is quantified using the method described by Randall (Rev. Macromol. Chem. Phys., C29, V.2&3, p. 285-297).

As a practical matter, current ^{13}C nuclear magnetic resonance spectroscopy cannot determine the length of a long chain branch in excess of six carbon atoms. However, there are other known techniques useful for determining the presence of long chain branches
15 in ethylene polymers, including ethylene/1-octene interpolymers. Two such methods are gel permeation chromatography coupled with a low angle laser light scattering detector (GPC-LALLS) and gel permeation chromatography coupled with a differential viscometer detector (GPC-DV). The use of these techniques for long chain branch detection and the underlying theories have been well documented in the literature. See, for example, Zimm, G.H. and
20 Stockmayer, W.H., *J.Chem. Phys.*, 17, 1301 (1949) and Rudin, A., Modern Methods of Polymer Characterization, John Wiley & Sons, New York (1991) pp. 103-112, both of which are incorporated by reference.

A. Willem deGroot and P. Steve Chum, both of The Dow Chemical Company, at the October 4, 1994, conference of the Federation of Analytical Chemistry and Spectroscopy
25 Society (FACSS) in St. Louis, Missouri, presented data demonstrating that GPC-DV is a useful technique for quantifying the presence of long chain branches in substantially linear ethylene interpolymers. In particular, deGroot and Chum found that the level of long chain branches in substantially linear ethylene homopolymer samples measured using the Zimm-Stockmayer equation correlated well with the level of long chain branches measured using ^{13}C NMR.

30 Further, deGroot and Chum found that the presence of octene does not change the hydrodynamic volume of the polyethylene samples in solution and, as such, one can account for the molecular weight increase attributable to octene short chain branches by knowing the mole percent octene in the sample. By deconvoluting the contribution to molecular weight increase attributable to 1-octene short chain branches, deGroot and Chum
35 showed that GPC-DV may be used to quantify the level of long chain branches in substantially linear ethylene/octene copolymers.

deGroot and Chum also showed that a plot of Log (I_2 , Melt Index) as a function of Log (GPC Weight Average Molecular Weight) as determined by GPC-DV illustrates that the long

chain branching aspects (but not the extent of long branching) of substantially linear ethylene polymers are comparable to that of high pressure, highly branched low density polyethylene (LDPE) and are clearly distinct from ethylene polymers produced using Ziegler-type catalysts such as titanium complexes and ordinary homogeneous catalysts such as hafnium and
5 vanadium complexes.

For ethylene/ α -olefin interpolymers, the long chain branch is longer than the short chain branch that results from the incorporation of the α -olefin(s) into the polymer backbone. The empirical effect of the presence of long chain branching in the substantial linear ethylene/ α -olefin interpolymers used in the invention is manifested as enhanced rheological
10 properties which are quantified and expressed herein in terms of gas extrusion rheometry (GER) results and/or melt flow, I_{10}/I_2 , increases.

The term "linear" means that the polymer lacks measurable or demonstrable long chain branches, that is, the polymer is substituted with an average of less than 0.01 long branch/1000 carbons.

15 The "rheological processing index" (PI) is the apparent viscosity (in kpoise) of a polymer measured by a gas extrusion rheometer (GER). The gas extrusion rheometer is described by M. Shida, R.N. Shroff and L.V. Cancio in Polymer Engineering Science, Vol. 17, No. 11, p. 770 (1977), and in "Rheometers for Molten Plastics" by John Dealy, published by Van Nostrand Reinhold Co. (1982) on pp. 97 to 99, both publications of which are incorporated by
20 reference herein in their entirety. GER experiments are performed herein at a temperature of 190°C, at nitrogen pressures between 250 to 5500 psig using a 3.81 cm diameter die and a 20:1 L/D rheometer with an entrance angle of 180°C. The processing index is measured herein at 3,000 psig.

For the substantially linear ethylene/ α -olefin interpolymers used herein, the PI is
25 the apparent viscosity (in kpoise) of a material measured by GER at an apparent shear stress of 2.15×10^6 dyne/cm². The substantially linear ethylene/ α -olefin interpolymers used herein preferably have a PI in the range of 0.01 kpoise to 50 kpoise, preferably 15 kpoise or less. The substantially linear ethylene/ α -olefin interpolymers used herein have a PI less than or equal to 70 percent of the PI of a comparative linear ethylene polymer (either a Ziegler polymerized
30 polymer or a linear uniformly branched polymer as described by Elston in US Patent 3,645,992) at about the same I_2 and M_w/M_n .

An apparent shear stress versus apparent shear rate plot can be used to identify the melt fracture phenomena. According to Ramamurthy in the Journal of Rheology, 30(2), 337 to 357, 1986, above a certain critical flow rate, the observed extrudate irregularities may be
35 broadly classified into two main types: surface melt fracture and gross melt fracture.

Surface melt fracture occurs under apparently steady flow conditions and ranges in detail from loss of specular film gloss to the more severe form of "sharkskin." In this disclosure, the onset of surface melt fracture (OSMF) is characterized at the beginning of losing

extrudate gloss at which the surface roughness of the extrudate can only be detected by 40x magnification. The critical shear rate at the onset of surface melt fracture for the substantially linear ethylene/ α -olefin interpolymers is at least 50 percent greater than the critical shear rate at the onset of surface melt fracture of a comparative linear ethylene polymer (either a Ziegler
 5 polymerized heterogeneously branched polymer or a homogeneously branched polymer as described by Elston in US Patent 3,645,992) having essentially the same I_2 and M_w/M_n . Preferably, the critical shear stress at onset of surface melt fracture for the substantially linear ethylene/ α -olefin interpolymers is greater than 2.8×10^6 dynes/cm².

Gross melt fracture occurs at unsteady extrusion flow conditions and ranges in
 10 detail from regular (alternating rough and smooth, helical, etc.) to random distortions. For commercial acceptability, (for example, in molded parts), surface defects should be minimal, if not absent, for good quality and properties. The critical shear rate at the onset of surface melt fracture (OSMF) and the onset of gross melt fracture (OGMF) will be used herein based on the changes of surface roughness and configurations of the extrudate. For the substantially linear
 15 ethylene/ α -olefin interpolymers, the critical shear stress at onset of gross melt fracture is preferably greater than 4×10^6 dynes/cm².

To more fully characterize the rheological behavior of the unique substantially linear ethylene/ α -olefin interpolymers, S. Lai and G.W. Knight introduced (ANTEC '93 Proceedings, INSITETTM Technology Polyolefins (ITP) - New Rules in the Structure/Rheology
 20 Relationship of Ethylene α -Olefin Copolymers, New Orleans, La., May 1993) another rheological measurement, the Dow Rheology Index (DRI), which expresses a polymer's "normalized relaxation time as the result of long chain branching." DRI ranges from 0 for polymers which do not have any measurable long chain branching (for example, "TAFMER" and "EXACT" products sold commercially by Mitsui Chemical and Exxon Chemical Company, respectively) to
 25 about 15 and is independent of melt index. In general, for low to medium density ethylene polymers (particularly at lower densities) DRI provides improved correlations to melt elasticity and high shear flowability relative to correlations of the same attempted with melt flow ratios. For the substantially linear ethylene/ α -olefin polymers used in this invention, DRI is preferably at least 0.1, and especially at least 0.5, and most especially at least 0.8. DRI can be calculated
 30 from the equation:

$$DRI = (3652879 \cdot \tau_0^{1.00649} / \eta_0 - 1) / 10$$

where τ_0 is the characteristic relaxation time of the material and η_0 is the zero shear viscosity of the material. Both τ_0 and η_0 are the "best fit" values to the Cross equation, that is

$$35 \quad \eta / \eta_0 = 1 / (1 + (\dot{\gamma} \cdot \tau_0)^{1-n})$$

where n is the power law index of the material, and η and $\dot{\gamma}$ are the measured viscosity and shear rate, respectively. Baseline determination of viscosity and shear rate data are obtained using a Rheometric Mechanical Spectrometer (RMS-800) under dynamic sweep mode from 0.1

to 100 radians/second at 190°C and a Gas Extrusion Rheometer (GER) at extrusion pressures from 1,000 psi to 5,000 psi (6.89 to 34.5 MPa), which corresponds to shear stress from 0.086 to 0.43 MPa, using a 3.81 centimeter diameter die and 20:1 L/D rheometer at 190°C. Specific material determinations can be performed from 140 to 190°C as required to accommodate melt index variations.

Substantially linear ethylene/ α -olefin interpolymers are considered to be "homogeneous" in composition distribution since substantially all of the polymer molecules have the same ethylene-to-comonomer ratio. Moreover, the substantially linear ethylene polymers have a narrow short chain (homogeneous) branching distribution, as defined by US Patent 3,645,992. The distribution of comonomer branches for the substantially linear ethylene/ α -olefin interpolymers is characterized by its SCBDI (Short Chain Branch Distribution Index) or CDBI (Composition Distribution Branch Index) and is defined as the weight percent of the polymer molecules having a comonomer content within 50 percent of the median total molar comonomer content. The CDBI of a polymer is readily calculated from data obtained from techniques known in the art, such as, for example, temperature rising elution fractionation (abbreviated herein as "TREF"). The SCBDI or CDBI for the substantially linear ethylene/ α -olefin interpolymers used in the present invention is preferably greater than 30 percent, especially greater than 50 percent.

The substantially linear ethylene/ α -olefin polymers used in this invention essentially lack a measurable "high density" fraction, as measured by the TREF technique. Preferably, the substantially linear ethylene/ α -olefin interpolymers do not contain a polymer fraction with a degree of branching less than or equal to 2 methyls/1000 carbons. The "high density polymer fraction" can also be described as a polymer fraction with a degree of branching less than 2 methyls/1000 carbons.

The molecular weight and molecular weight distribution, M_w/M_n ratio, of substantially linear ethylene/ α -olefin interpolymers can be analyzed by gel permeation chromatography (GPC) on a Waters 150 high temperature chromatographic unit equipped with differential refractometer and three columns of mixed porosity. The columns are supplied by Polymer Laboratories and are commonly packed with pore sizes of 10^3 , 10^4 , 10^5 and 10^6 Å. The solvent is 1,2,4-trichlorobenzene, from which 0.3 percent by weight solutions of the samples are prepared for injection. The flow rate is 1.0 milliliters/minute, unit operating temperature is 140°C and the injection size is 100 microliters.

The molecular weight determination with respect to the polymer back-bone is deduced by using narrow molecular weight distribution polystyrene standards (from Polymer Laboratories) in conjunction with their elution volumes. The equivalent polyethylene molecular weights are determined by using appropriate Mark-Houwink coefficients for polyethylene and polystyrene (as described by Williams and Ward in Journal of Polymer Science, Polymer Letters, Vol. 6, p. 621, 1968) to derive the following equation:

$$M_{\text{polyethylene}} = a * (M_{\text{polystyrene}})^b.$$

In this equation, $a = 0.4316$ and $b = 1.0$. Weight average molecular weight, M_w , is calculated in the usual manner according to the following formula: $M_w = \sum w_i * M_i$, where w_i and M_i are the weight fraction and molecular weight, respectively, of the i^{th} fraction eluting
5 from the GPC column.

For the substantially linear ethylene/ α -olefin interpolymers used in the present invention, the M_w/M_n is preferably less than 3, especially from 1.5 to 2.5.

The novel molded material comprises from 1 to 40 weight percent, based on the combined weight of components (A) and (B), of the substantially linear ethylene/ α -olefin
10 interpolymer, generally from 5 to 40 weight percent, preferably from 7.5 to 40 weight percent, more preferably from 10 to 35 weight percent, and most preferably from 15 to 30 weight percent.

The substantially linear ethylene/ α -olefin interpolymer used to prepare the molded material of the present invention has an I_2 melt index in the range of 0.3 g/10 minutes
15 to 3 g/10, preferably, 0.3 g/10 minutes to 2.5 g/10 minutes and, more preferably, 0.4 g/10 minutes to 2 g/10 minutes. The substantially linear ethylene/ α -olefin interpolymer has a density in the range of 0.85 g/cc to 0.92 g/cc, preferably, in the range of 0.85 g/cc to 0.916 g/cc, more preferably, in the range of 0.86 g/cc to 0.91 g/cc, and most preferably in the range of 0.86 g/cc to 0.89 g/cc. The I_{10}/I_2 ratio of the substantially linear ethylene/ α -olefin interpolymers is in the
20 range from 5.63 to 30, preferably less than 20, especially less than 15, and most especially less than 10.

Component (B) can be a blend of substantially linear ethylene/ α -olefin interpolymers. Component (B) may be blended with at least one heterogeneous or homogeneous linear ethylene polymer (C) which is selected from ULDPE or LLDPE, preferably
25 with a heterogeneous ULDPE. The total weight of components (B) and (C) preferably is up to about 40 weight percent, more preferably up to about 35 weight percent, most preferably up to about 30 weight percent, based on the combined weight of components (A), (B) and (C).

Heterogeneously branched ULDPE and LLDPE are well known and commercially available materials. They are typically prepared using Ziegler-Natta catalysts in solution or gas
30 phase polymerization processes Anderson et al., U.S. Patent 4,076,698, is illustrative. These traditional Ziegler-type linear polyethylenes are not homogeneously branched and they do not have any long-chain branching. Heterogeneously branched ULDPE and LLDPE typically having molecular weight distributions, M_w/M_n , in the range of from 3.5 to 4.1.

Homogeneously branched ULDPE and LLDPE are also well known. Elston
35 disclosure in U.S. Patent 3,645,992 is illustrative. Homogeneously branched ULDPE and LLDPE can be prepared in conventional polymerization processes using Ziegler-type catalysts such as, for example, zirconium and vanadium catalyst systems as well as using metallocene catalyst systems such as, for example, those based on hafnium. Ewen et al. disclosure in U.S. Patent

4,937,299 and Tsutsui et al. disclosure in U.S. Patent 5,218,071 are illustrative. The disclosures of Elston Ewen et al. and Tsutsui et al. This second class of linear polyethylenes are homogeneously branched polymers, and like traditional Ziegler-type heterogeneous linear polyethylenes, they do not have any long-chain branching. Homogeneously branched ULDPE and LLDPE typical having molecular weight distributions, M_w/M_n , of about 2. Commercial examples of homogeneously branched linear polyethylenes include those sold by Mitsui Petrochemical Industries under the designation "TAFMER" and by Exxon Chemical Company under the designation "EXACT".

The molded polyethylene material of the present invention can be produced by known processes, for example by casting processes, compression molding or, preferably, by extrusion.

In a typical extrusion process, a polyethylene composition is introduced into a screw extruder wherein it is melted and forwarded through the extruder under pressure. The molten polymer composition is forced through a flat or annular die to form a molten sheet or tube. The extruder temperature is preferably in the range from 160°C to 250°C, more preferably from 170°C to 210°C. It is known how to produce the material of the desired thickness.

Both monolayer and multilayer molded polyethylene materials can be prepared by extrusion and the materials of the present invention can be monolayer or multilayer structures. Multilayer molded polyethylene materials can be prepared by any known technique in the art, including, for example, coextrusion, lamination or combinations of both. However, the preferred medium modulus, molded polyethylene material of the present invention is a monolayer structure.

Components (A) and (B), and optional Component (C), used to prepare the molded material of this invention, can be individually blended (that is, where a component itself is a polymer blend of two or more subcomponent polymers) or admixed together by any suitable means known in the art. Suitable means are thought to include tumble dry-blending the components together prior to charging the extruder, weight-feeding the components directly into the extruder, melt-blending the components via compound or side-arm extrusion prior to introduction into the extruder, multiple reactor polymerization of the components with reactors in series or in parallel and optionally with different catalyst and/or monomer types in each reactor, or the like as well as combinations thereof.

Additives, such as antioxidants (for example, hindered phenolics, such as Irganox® 1010 or Irganox® 1076 supplied by Ciba Geigy), phosphites (for example, Irgafos® 168 also supplied by Ciba Geigy), cling additives (for example, PIB), stearates, Standostab PEPQ® (supplied by Sandoz), pigments, colorants, such as carbon black and fillers can also be included in the molded material of the present invention, or the polymer compositions used to make the same, to the extent that such additives or ingredients do not interfere with the improved

impact strength discovered by Applicants. Although generally not required, the molded material of the present invention can also contain additives to enhance antiblocking and coefficient of friction characteristics including, but not limited to, untreated and treated silicon dioxide, talc, calcium carbonate, and clay, as well as primary, secondary and substituted fatty acid amides, release agents, silicone coatings, etc. Still other additives, such as quaternary ammonium compounds alone or in combination with ethylene-acrylic acid (EAA) copolymers or other functional polymers, can also be added to enhance the antistatic characteristics of the polyethylene material of this invention.

Advantageously, because of the improved strength properties of the novel polyethylene material, recycled and scrap materials as well as diluent polymers can be incorporated or admixed into the polyethylene compositions used to make the novel molded polyethylene material at higher loadings than is typically possible with prior art polyethylene compositions and still provide or maintain the desired performance properties. Suitable diluent materials include, for example, elastomers, rubbers and anhydride modified polyethylenes (for example, polybutylene and maleic anhydride grafted LLDPE and HDPE) as well as with high pressure polyethylenes such as, for example, low density polyethylene (LDPE), ethylene/acrylic acid (EAA) interpolymers, ethylene/vinyl acetate (EVA) interpolymers and ethylene/methacrylate (EMA) interpolymers, and combinations thereof.

Examples

The following Examples illustrate some of the particular embodiments of the present invention, but the following should not be construed to mean the invention is limited only to the particular embodiments shown. Unless otherwise mentioned, all parts and percentages are by weight.

Examples 1 to 5 and Comparative Examples A to J

Compression molded bars of various thicknesses were produced as follows: Polymers and polymer blends of the compositions listed in Table I below were extruded on a Leistritz ZSE65 counter-rotating twin screw extruder after dry blending and adding 1000 ppm of each of Irganox™ 1010, Irgafos™ 168, zinc stearate and calcium stearate. The temperature settings of the different zones were 180/190/200/200/200/210/210°C. The melt temperature was approximately 212°C at a screw speed of 40 RPM (revolutions per minute) and an output rate of approximately 25.4 kg/hr. The specific energy was 0.254 kWh/kg.

The extruded pellets were compression molded on a Fontijne hot press for 5 minutes at 3 ton ram force and for 6 minutes at 28 ton ram force at a temperature of 190°C for tensile and Izod impact measurements. The procedure for preparing the samples for the PENT and G_c measurements was as follows: 520 g of material was placed into a 12 mm thick steel mould which was isolated at the sides by a polytetrafluoroethylene-coated frame, the sample was heated for 3 minutes at 160°C without pressure, followed by 3 minutes at 10.6 ton ram force, 1 minute without pressure, 1 minute at 10.6 ton ram force and 1 minute without

pressure. The temperature was increased to 180°C and a ram force of 10.6 ton was applied for 11 minutes. Two one minute cycles of pressure release and pressurizing at 10.6 ton ram force were applied. After 1 minute of pressure release, the sample was pressurized again at 2.6 ton ram force and allowed to cool slowly overnight. From this sheet the test specimens were
 5 machined with the required dimensions. For the Izod Impact measurements bars of 63.5 mm x 12.7 mm x 4 mm are used; the G_c measurements are conducted on bars of 125 mm x 10 mm x 10 mm; and the PENT test was made with bars of 50 mm x 25 mm x 10 mm.

The polymers used in the various formulations are:

1. HDPE 1 (Component A) is a high molecular weight HDPE resin having a melt index
 10 $I_5 = 0.28$ g/10min., a density of 0.952 g/cm³, and a melt flow ratio I_{21}/I_5 of 23 (Comonomer: 1-butene).
2. HDPE 2 (Component A) is a high molecular weight HDPE resin having an I_5 of 0.75 g/10 min. and a density of 0.952 g/cm³ (Comonomer: 1-butene).
3. SLEP 1 is a substantially linear ethylene-octene copolymer having a melt index I_2
 15 of 0.82 g/10 min., a density of 0.87 g/cm³, a melt flow ratio I_{10}/I_2 of 7.9, M_w/M_n of 1.98, a Critical Shear Rate of 503 s⁻¹ and a Critical Shear Stress of 3.0×10^6 dyne/cm².
4. SLEP 2 is a substantially linear ethylene-octene copolymer having an I_2 of 1.0 g/10 min., a density of 0.902 g/cm³, a melt flow ratio I_{10}/I_2 of 9.52, M_w/M_n of 2.19, a
 20 Critical Shear Rate of 1386 s⁻¹ and a Critical Shear Stress of 4.3×10^6 dyne/cm².
5. VLDPE is an ethylene-octene copolymer having an I_2 of 1 g/10 min., a density of 0.907 g/cm³, a melt flow ratio I_{10}/I_2 of 9.4 and M_w/M_n of 3.5.
6. LLDPE is an ethylene-octene copolymer, having an I_2 of 0.94 g/10 min., a density of 0.92 g/cm³, a melt flow ratio I_{10}/I_2 of 8.6 and M_w/M_n of 3.3.
- 25 7. Mitsui Tafmer™ P-0480 ULDPE is an ethylene-propylene copolymer having an $I_2 = 1$ g/10 min., a density of 0.87 g/cm³ and a melt flow ratio I_{10}/I_2 of 5.9.
8. Elastomer: Union Carbide Flexomer™ GERS-1085 is used which is an ethylene-butene copolymer with a narrow molecular weight distribution. The elastomer has a density of 0.884 g/cm³ and a Mooney viscosity ML (1 + 4) 125°C of 30.
- 30 9. Polysar™ Butyl 100 is a Butyl rubber having a density of 0.92 g/cm³ and a Mooney viscosity ML 8 (125°C) of 45.
10. Polysar™ Butyl 301 is a Butyl rubber having a density of 0.92 g/cm³ and a Mooney viscosity ML 8 (125°C) of 51.
11. EPM rubber having a density (specific gravity) of 0.86 g/cm³ and a Mooney
 35 viscosity ML(1 + 4) 125°C of 25; it is commercially available from Exxon under the trademark Vistalon 504.

12. EDPM rubber having a density of 0.86 g/cm³ and a Mooney viscosity ML(1 + 4) 125°C of 25; it is commercially available from Exxon under the trademark Vistalon 2504.

Polymers 1 - 6 are supplied by The Dow Chemical Company.

5

Table I

(Comp.) Example	A	1	2	3
Composition	100% HDPE1	95% HDPE1 5% SLEP1	90% HDPE1 10% SLEP2	90% HDPE1 10% SLEP1
10 I_5 [g/10min]	0.28	0.28	0.43	0.33
$I_{21.6}$ [g/10min]	6.50	7.19	9.40	7.57
Ratio $I_{21.6}/I_5$	23.2	25.7	23.2	22.9
15 Crystallinity [%]	71.2	67.1		61.7
Density meas. [g/cm ³] calc.	0.9511 —	0.9466 0.9467	0.9460 0.9460	0.9445 0.9424
Yield strength [MPa]	23.3	21.2	21.4	19.7
20 Ultim. Tens. strength [MPa]	38.1	40.7	40.8	36.6
Elongation [%]	855	909	923	840
25 Izod Impact [J/m] 20°C	246	391	383	831
0°C	205	304	287	830
-20°C	185		204	384
Gc [kJ/m ²] 20°C	11.9	17.1	16.6	29.0
30 PENT [min]	2204	6248	2829	10872

Density meas. = measured density

Density calc. = calculated density

35

Table I (continued 1)

(Comp.) Example	B	C	4	D
Composition	82% HDPE1 18% LLDPE	87% HDPE1 13% VLDPE	80% HDPE1 20% SLEP1	74% HDPE1 36% VLDPE
I_5 [g/10min]	0.41	0.39	0.46	0.69
$I_{21.6}$ [g/10min]	9.00	8.85	8.60	12.90
Ratio $I_{21.6}/I_5$	22.0	22.7	18.7	18.7
Crystallinity [%]	58.7	61.3	57.9	60.4
Density meas. [g/cm ³] calc.	0.9447 0.9453	0.9451 0.9451	0.9348 0.9339	0.9345 0.9347
Yield strength [MPa]	20.6	20.6	15.9	15.8
Ultim. Tens. strength [MPa]	39.4	30.5	36.1	36.6
Elongation [%]	908	761	868	926
Izod Impact [J/m] 20°C	309	379	815 (no break)	705
0°C	233	263	864 (no break)	689
-20°C				
Gc [kJ/m ²] 20°C	14.4	15.6	49.1	29.0
PENT [min]	11169	12003	933 (yielding)	>78000

Density meas. = measured density

Density calc. = calculated density

Table I (continued 2)

(Comp.) Example	5	E	F	G
5 Composition	80% HDPE2 20% SLEP1	90% HDPE1 10% ULDPE	88% HDPE1 12% Elastomer	91% HDPE1 9% Butyl 100
I_5 [g/10min]	1.18	0.42	0.44	0.35
$I_{21.6}$ [g/10min]	22.05	8.77	9.42	8.59
10 Ratio $I_{21.6}/I_5$	18.7	21.0	21.4	24.5
Crystallinity [%]	56.6	65	66	68
Density meas. [g/cm ³] calc.	0.9340 0.9339	0.9416 0.9423	0.9443 0.9425	0.9476 0.9482
15 Yield strength [MPa]	16.2	19.48	19.92	19.56
Ultim. Tens. strength [MPa]	35.5	33.48	35.45	29.87
20 Elongation [%]	918	943	868	806
Izod Impact [J/m] 20°C	740	579	553	302
0°C		571	413	155
-20°C		273	150	89
25 Gc [kJ/m ²] 20°C	33.2	20.58	18.77	7.9
0°C		17.09	14.63	6.33
-20°C		7.31	6.34	4.32
PENT [min]	45	108	2337	1959

Density meas. = measured density

30 Density calc. = calculated density

Table I (continued 3)

(Comp.) Example	H	I	J
Composition	91% HDPE1 9% Butyl 301	91% HDPE1 9% EPM	91% HDPE1 9% EDPM
I_5 [g/10min]	0.32	0.38	0.37
$I_{21.6}$ [g/10min]	8.21	8.87	8.76
Ratio $I_{21.6}/I_5$	25.7	23.3	23.7
Crystallinity [%]	66	70	66
Density meas. [g/cm ³] calc.	0.9495 0.9482	0.9435 0.9421	0.9438 0.9421
Yield strength [MPa]	22.18	20.14	19.47
Ultim. Tens. strength [MPa]	37.54	35.02	23.78
Elongation [%]	863	909	647
Izod Impact [J/m] 20°C	420	448	530
0°C	149	632	615
-20°C	81	325	147
Gc [kJ/m ²] 20°C	8.46	10.3	17.26
0°C	6.2	6.51	13.49
-20°C	4.57	4.24	5.37
PENT [min]	1956	2781	885

Density meas. + measured density

Density calc. = calculated density

Table I lists both measured and calculated sheet density and measured melt indexes and melt flow ratios.

Table I illustrates the effect of modifying high molecular weight (HMW) HDPE with SLEP 1 at a level of 10 percent SLEP 1 (Example 3). The Izod impact value and the critical strain energy release rate G_c are about three times as high as the values of HDPE alone (Comparative Example A). For similar stiffness or yield strength, blends of HMW HDPE with LLDPE or VLDPE (Comparative Examples B and C) give only small improvements versus the HDPE alone. The bars of Comparative Examples B and C have essentially the same density and thickness and a similar melt index I_5 as the bars of Example 3, but much lower Izod impact values and much lower G_c values than the bars of Example 3. For a yield strength of 21.2 MPa both the blends of Examples 1 and 2 give similar Izod impact properties and G_c values. The slow crack growth parameter PENT, however, is twice as high with the blend of Example 1 versus the blend of Example 2. Differences between the Examples 3 and 5, especially in the PENT result, can be attributed to the higher M_w of the high density component A in the former blend.

The comparison between Examples 1 and 2 illustrate that, within the preferred density range of 0.86 g/cc to 0.91 g/cc for the substantially linear ethylene / α -olefin, (SLEP), those SLEP's are preferred which have a density of from 0.86 g/cc to 0.89 g/cc.

The compression molded bars of Example 3 have an Izod Impact value which is at least 15 percent higher than the Izod Impact value of all Comparative Examples. With the exception of Comparative Example D (which has a low yield strength), the Izod impact of all Comparative Examples is even at least 30 percent lower than the Izod Impact value of Example 3. Furthermore, the molded bars of Example 3 show excellent results in the G_c test (critical strain energy release rate).

Furthermore, the compression molded bars of Examples 1 and 2 have a higher stiffness (yield strength) and a higher G_c value than Comparative Examples B and C, whereas their Izod impact is higher than the Izod impact of Comparative Example B and similar to the Izod impact of comparative example C. Examples 1 and 2 are not comparable with Comparative Examples D, E, F, G, I and J because the yield strength of Comparative Examples D, E, F, G, I and J is considerably lower than the yield strength of Examples 1 and 2. Examples 1 and 2 do not show a better Izod Impact value than comparative example H but a considerably better G_c value and PENT value.

Example 3, having a similar yield strength as Comparative Examples E, F, G, I and J, show higher Izod impact, G_c and PENT values than these Comparative Examples.

Examples 6 and 7

To produce the pipes of Examples 6 and 7 respectively, the resin blends of Examples 1 and 3 respectively were used which, however, additionally contained 2.25 percent of carbon black. A pipe having a diameter of 125 mm and a wall thickness of 11.4 mm (Standard Dimension Ratio of 11) was produced on a Weber 90 (90 mm extruder) equipped

with a Gneuss rotating melt filter and fitted with the appropriate standard mandrel and pipe die. The melt temperature ranges from 190°C to 210°C at 126 rpm of the extruder. The extruder output was 430 kg/hr at a die pressure of 165 to 170 bar, this corresponds to a pipe production output of 1.753 m/min. The extruded pipe was vacuum calibrated and water cooled.

The critical pressures $P_{c,S4}$ measured in the Small Scale Steady State (S4) rapid crack growth tests are as follows:

	Temperature	Example 6	Example 7
10	0°C	> 10 bar	> 10 bar
	- 10°C	> 10 bar	> 10 bar
	- 15°C	> 10 bar	> 8 bar

15

For commercially available polyethylene gas pipes of a diameter of 110 mm and a wall thickness of 10 mm (Standard dimension ratio of 11) the following values were reported by P. Vanspeybroek (P. Vanspeybroek, Proceedings of Plastic Pipes VIII, Eindhoven, The Netherlands, Sept. 1992,, The Plastics and Rubber Institute, p. D1/6 - 1-14):

20 $P_{c,S4}$: 2.5 bar (at 0°C)
1.8 bar (at -10°C)
1.8 bar (at -15°C).

25

30

35

1. A medium modulus, molded polyethylene material characterized as having a thickness greater than 0.23 mm which comprises:
 - (A) from 60 to 99 weight percent, based on the combined weight of components (A) and (B), of at least one high molecular weight linear ethylene polymer having a density in the range of 0.92 to 0.96 g/cc and an I_5 melt index in the range of 0.1 to 3 g/10 minutes, and
 - (B) from 1 to 40 weight percent, based on the combined weight of components (A) and (B), of at least one substantially linear ethylene/ α -olefin interpolymer characterized as having:
 - i. a melt flow ratio, $I_{10}/I_2 \geq 5.63$,
 - ii. a molecular weight distribution, M_w/M_n , defined by the equation:

$$M_w/M_n \leq (I_{10}/I_2) - 4.63$$
, and
 - iii. a critical shear rate at onset of surface melt fracture at least 50 percent greater than the critical shear rate at the onset of surface melt fracture of a linear olefin polymer having essentially the same I_2 and M_w/M_n ,
- wherein the substantially linear ethylene/ α -olefin polymer is further characterized as containing at least one α -olefin monomer and having a density in the range of 0.85 to 0.92 g/cc and an I_2 melt index in the range of 0.3 to 3 g/10 minutes.
2. The material of Claim 1 wherein said material comprises from 60 to 95 weight percent of said component (A) and from 5 to 40 weight percent of said component (B), based on the combined weights of components (A) and (B).
3. The material of Claim 1 or Claim 2 wherein said material is a pipe, tube, bar, wire coating, sheet, an automotive part or a container.
4. The material of any one of Claims 1 to 3 wherein its thickness is in the range of 0.5 mm to 50 mm.
5. The material of any one of Claims 1 to 4 wherein said high molecular weight linear ethylene polymer is an interpolymer of ethylene and at least one α -olefin, the α -olefin being 1-propylene, 1-butene, 4-methyl-1-pentene, 1-hexene or 1-octene.
6. The material of any one of Claims 1 to 5 wherein said substantially linear ethylene/ α -olefin polymer is further characterized as having from 0.01 long chain branches/1000 carbons to 3 long chain branches/1000 carbons along the polymer backbone.
7. The material of any one of Claims 1 to 6 wherein said substantially linear ethylene/ α -olefin polymer is an interpolymer of ethylene and at least one α -olefin, the α -olefin being 1-propylene, 1-butene, 4-methyl-1-pentene, 1-hexene or 1-octene.
8. The material of any one of Claims 1 to 7 wherein said high molecular weight linear ethylene polymer has an I_5 melt index in the range of 0.15 g/10 min. to 0.5 g/10 min.
9. The material of any one of Claims 1 to 8 wherein said substantially linear ethylene polymer has an I_2 melt index in the range of 0.3 g/10 minutes to 2.5 g/10 minutes.

10. The material of any one of Claims 1 to 9 wherein said substantially linear ethylene polymer has a density in the range of 0.855 g/cc to 0.918 g/cc.

11. A method for preparing the medium modulus molded polyethylene material of any one of Claims 1 to 10 comprising the steps of:

- 5 (1) providing an extrudable thermoplastic composition containing (A) from 60 to 99 weight percent, based on the combined weights of components (A) and (B), of at least one high molecular weight linear ethylene polymer having a density in the range of 0.92 to 0.96 g/cc and an I_5 melt index in the range of 0.1 to 3 g/10 minutes, and (B) from 1 to 40 weight percent, based on the combined weights of components (A) and (B), of at least one substantially linear
10 ethylene/ α -olefin interpolymer characterized as having:

i. a melt flow ratio, $I_{10}/I_2 \geq 5.63$,

ii. a molecular weight distribution, M_w/M_n , defined by the equation:

$$M_w/M_n \leq (I_{10}/I_2) - 4.63, \text{ and}$$

- iii. a critical shear rate at onset of surface melt fracture at least 50 percent greater
15 than the critical shear rate at the onset of surface melt fracture of a linear olefin polymer having essentially the same I_2 and M_w/M_n ,
wherein the substantially linear ethylene/ α -olefin interpolymer is further characterized as containing at least one α -olefin monomer and having a density in the range of 0.85 to 0.92 g/cc and an I_2 melt index in the range of 0.3 to 3 g/10 minutes, optionally pelletizing the
20 composition,

(2) introducing said optionally pelletized composition of step (1) into an extrusion apparatus, and

(3) extruding said composition of step (1) to form a material with a thickness greater than 0.23 mm, and

- 25 (4) conveying said material formed in step (3) for subsequent use down-line of the extrusion apparatus of step (2) or collecting said material formed in step (3) for subsequent use off-line.


12. A pipe or tube produced by the method of Claim 11.

30

35

1/1

Figure 1

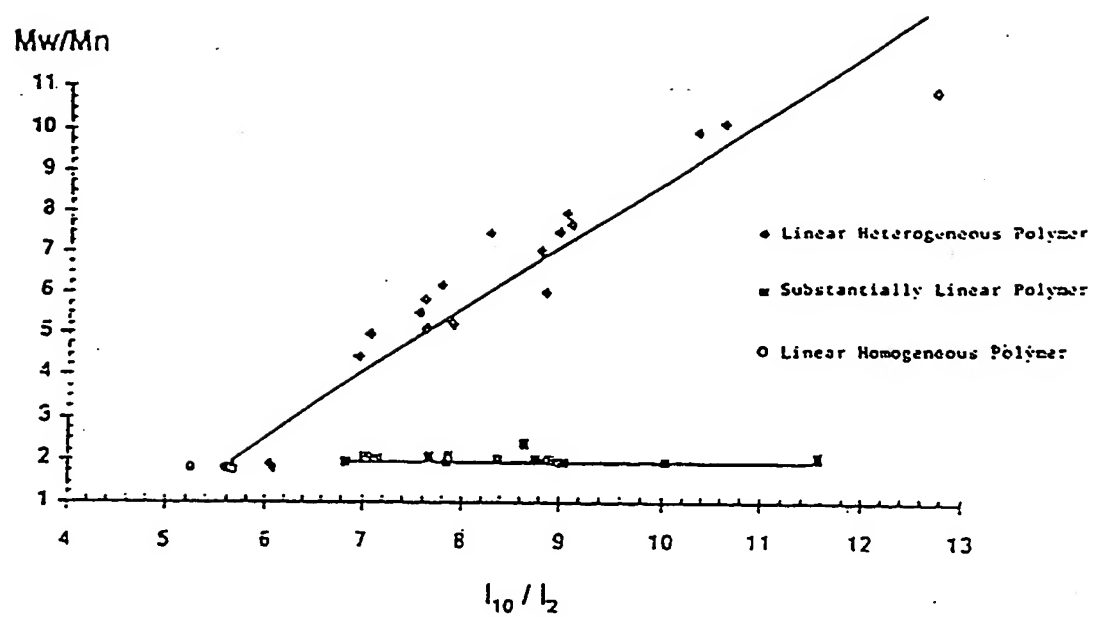

INTERNATIONAL SEARCH REPORT

Interns Application No
PCT/US 95/07643

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 C08L23/06 C08L23/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 C08L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP,A,0 492 656 (NIPPON PETROCHEMICALS CO LTD) 1 July 1992 see page 32, line 4 - line 17; claims ---	1-12
A	EP,A,0 533 156 (PHILLIPS PETROLEUM CO) 24 March 1993 see claims -----	1-12

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *A* document member of the same patent family

Date of the actual completion of the international search

29 February 1996

Date of mailing of the international search report

15. 03. 96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Clemente Garcia, R

INTERNATIONAL SEARCH REPORT

Information on patent family members

Internat'l Application No
PCT/US 95/07643

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0492656	01-07-92	JP-A- 4249562 US-A- 5189106	04-09-92 23-02-93
EP-A-0533156	24-03-93	CA-A- 2078366 JP-A- 5202243 US-A- 5319029	19-03-93 10-08-93 07-06-94